



## Küresel su Vanası

Ball Valve For Water

Standart Numarası  
Standard number

TS EN 13547

Basınç Sınıfı  
Pressure class


PN 16-25-40

Sıcaklık Sınıfı  
Heat class

100°C -10°C



ISO 7/1  
EN 10226-1




TÜRK STANDARLARI ENSTİTÜSÜ



TS EN 13547 Türk Standartları Enstitüsü Onayı.  
ISO 9001:2015 Kalite Sistem Sertifikası.  
Maksimum akışkanlık için tam geçiş.  
Daha uzun ömür için krom kaplama küre.  
ISO 7-1 EN 10226-1 Dişi X Dişi bağlantı.  
Ekstra güvenlik için çift O-ring  
Maksimum sızdırmazlık için PTFE conta ve EPDM O-ring.  
Kalın Galvaniz PVC kaplı çelik kol.  
Basıncılı kaplar Endüstriyel, Tesisat ve sulama sistemlerinde kullanılmak üzere geniş kullanım alanı.  
5 Yıl Kullanım garantisi

TS EN 13547 Turkish Standard Institute approval  
ISO 9001:2015 Quality System Certificate  
Full Port For Maximum Flow  
Chrome plated a brass ball for longer service time  
ISO 7-1 EN 10226-1 Female Female Thread connection  
Double O-ring for extra safety  
PTFE gasket and EPDM O-ring for maximum a tightness  
Thick Galvanized PVC coated steel handle.  
Wide range of uses in applications for plumbing irrigation systems, pressure vessels and industrial systems  
5 Years Warranty

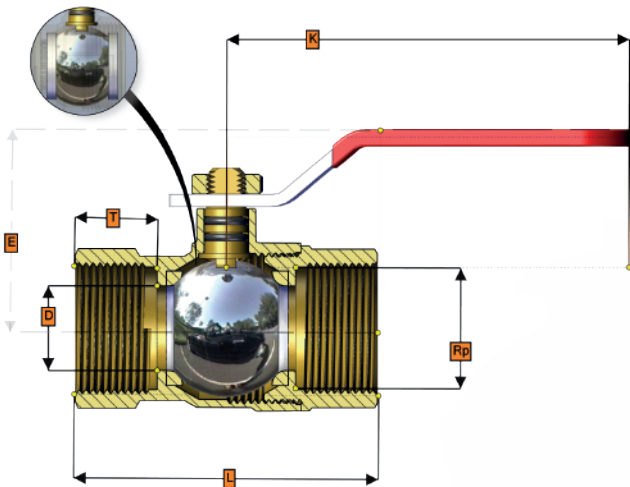

Ürün Kodu Product code	Anma Ölçüsü (Rp) Nominal Size			ØD		L		K	T	E
	16	25	40	16/25	40	16/25	40			
119	•	•	1/4"	9,3	X	44	X	32	10	32
119/1	•	•	3/8"	9,3	X	44	X	32	10	32
120	110	130	1/2"	12	15	53	54	80	15	37
121	111	131	3/4"	17	20	61	63	95	16,5	53
122	112	132	1"	25	25	76	76	115	19,3	55
123	113	133	1 1/4"	30	30	86	86	115	21,5	59
124	114	134	1 1/2"	40	40	97	97	125	21,5	77
125	115	135	2"	44	47	113	120	145	26	90
126	116	•	2 1/2"	58	X	135	X	230	30,5	107
127	117	•	3"	70	X	156	X	250	33,5	120
128	118	•	4"	85	X	175	X	250	35	135

Yukarıda belirtilen değerler değişiklik gösterebilir. Values mentioned above may vary.