

YAYLI EMNİYET VENTİLİ ORANSAL KALKIŞLI (Flansli)
SPRING SAFETY VALVE PRORTIONAL LIFT (Flanged)


NES
NES2007-P
NES2007-S

Anma Çapı :DN 25DN 100
 Anma Basıncı :PN 16/25
 Flanş : DIN EN 1092-2
 Test : DIN EN 12266-1
 Set basıncı : PİK =0.5-10 bar
 Sfero=10-15 bar

Nominal Diameter :DN 25.....DN 100
 Nominal Pressure :PN 16/25
 End Flange : DIN EN ISO 1092-2
 Test : DIN EN 12266-1
 Set Pressure : Cast iron =0.5-10 bar
 Ductile iron=10-15 bar

No	Parça Adı	Part name	Material	Malzeme
1	Gövde	Body	EN JI 1040 (GG-25)	EN JS 1030 (GG-40)
2	Sit	Seat	AISI 304	
3	Klape	Disc	AISI 304	
4	Mil	Stem	AISI 304	
5	Conta	Gasket	Graphite / Grafit	
6	Merkezleme parçası	Guide	Otomat çeligi+Zn	
7	Mil yatağı	Stem nut	CW617N (Ms-58)	
8	Kapak	Bonnet	EN JS 1030 (GG-40)	
9	Yay alt sacı	Spring plate	Otomat çeligi+Zn	
10	Yay	Spring	Spring Steel/Yay çeligi	
11	Yay üst sacı	Spring plate	Otomat çeligi+Zn	
12	Civata	Bolt	8.8 (CK35)	
13	Yay ayar vidası	Adjusting screw	CW617N (Ms-58)	
14	Başlık	Cap	EN JS 1030 (GG-40)	
15	Başlık Civatası	Cap bolt	8.8 (CK35)	
16	Kol	Lever	EN JS 1030 (GG-40)	
17	Kol Civatası	Lever bolt	8.8 (CK35)	

DIN 2401	-20 +120	+150	+200	+250	+300
EN JI 1040 (GG-25)	16	14.4	13	11	10
EN JS 1030 (GG-40)	25	24.3	20	18	16

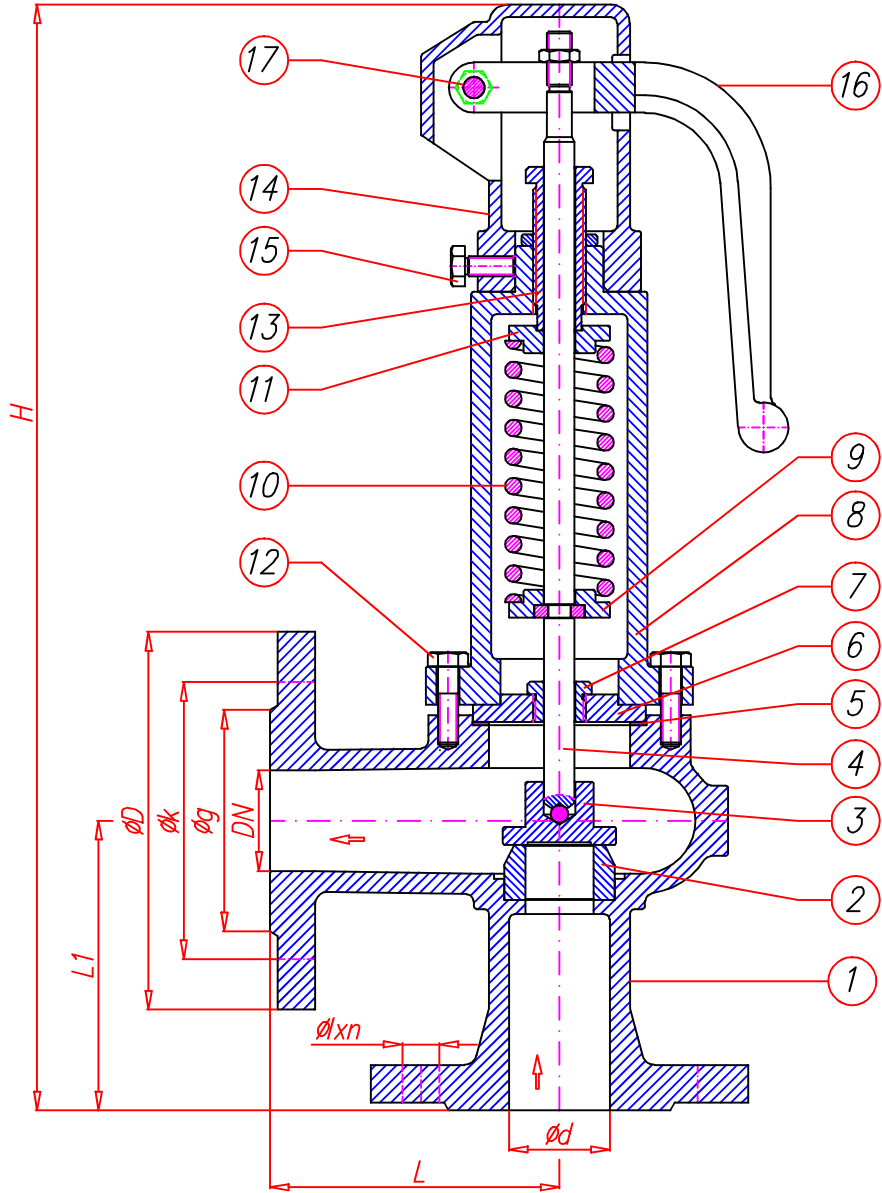

DN	Valve Dimensions Vana Boyutları			Flange Dimensions DIN EN 1092-2				Weight Ağırlık	Flange Dimensions DIN EN 1092-2				Weight Ağırlık	DN		
	L	L1	H	ød	øD	øk	øg		øxn	ød	øD	øk			øg	øxn
25	100	100	430	25	115	85	68	ø14x4	10.50	25	115	85	68	ø14x4	10.50	25
32	105	105	440	32	140	100	78	ø18x4	12.30	32	140	100	78	ø18x4	12.30	32
40	115	115	450	40	150	110	88		13.20	40	150	110	88		13.20	40
50	125	125	510	50	165	125	102		18.60	50	165	125	102		18.60	50
65	145	145	560	65	185	145	122	ø18x8	25.10	65	185	145	122	ø18x8	25.10	65
80	155	155	565	80	200	160	138		29.65	80	200	160	138		29.65	80
100	160	160	570	100	220	180	158		32.75	100	235	190	162		ø22x8	34.00